

Technical information:

Installation:	Ground recess, Ground, Wall recess, Wall, Surface mounting ground
Finish:	Polished stainless steel
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	2
Lumen:	240
Real Lumen:	83
Power supply:	⊗ not included
LED:	24V
Insulation class:	⬡ CL.III
Power cable:	0.50 m H05RN-F 2x0.75
Type of protection:	IP 67
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA
Additional features:	↓ 500 KG MAX ↑ 53°C MAX


The polished stainless steel version is made of AISI 304.



CNC 49 Q4L

LL127120N

Lombardo.

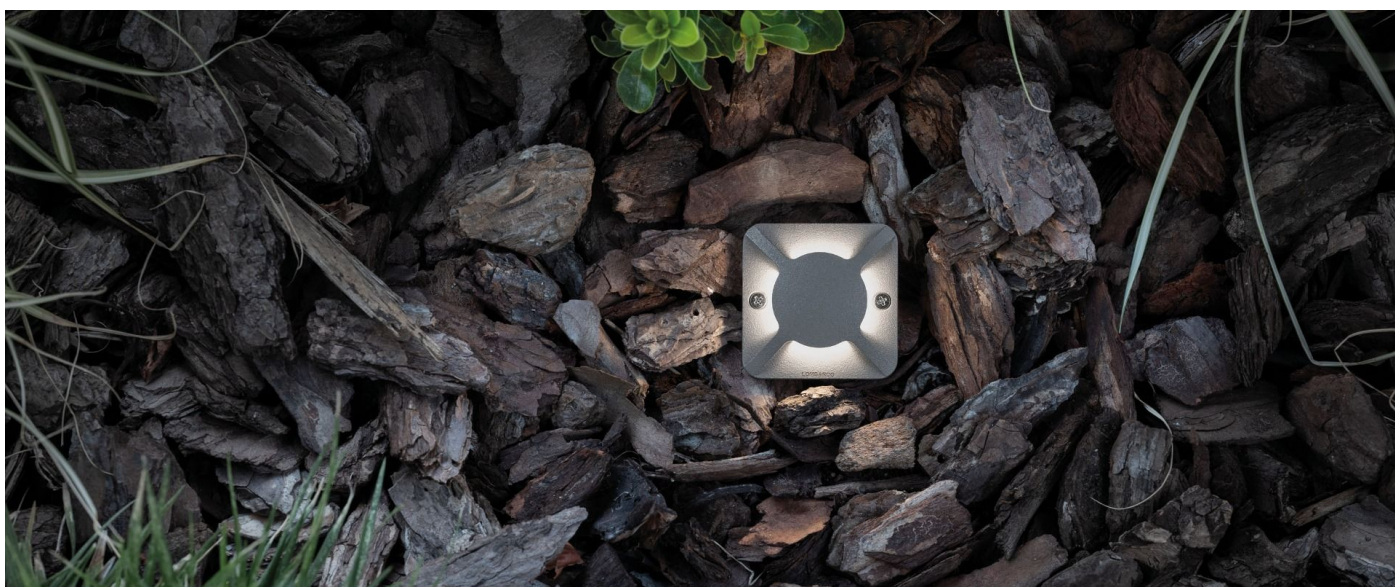


Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

Lighting simulation:

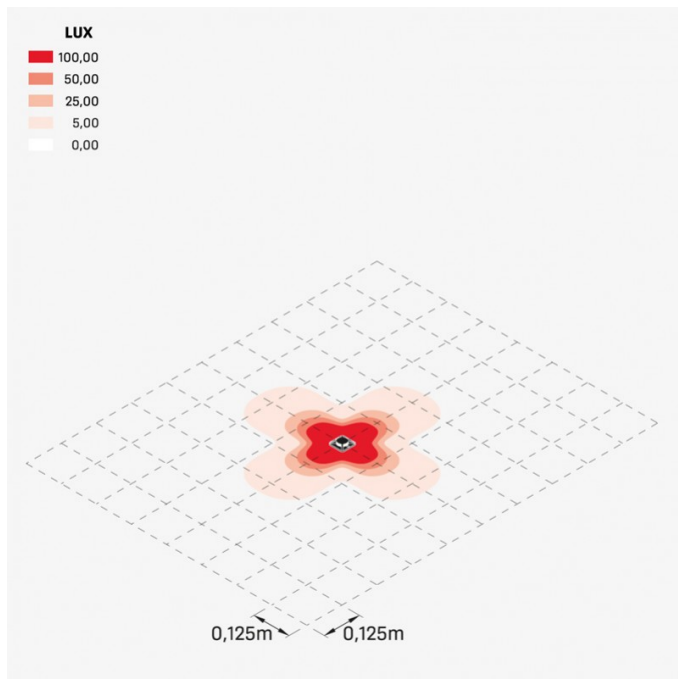

cnc_49_q4l

Photometric curves:

