


Technical information:

Installation:	Ground, Post Ø60, Post ground
Material:	Aluminium
Finish:	White RAL 9010
Treatment:	Sea Treatment
Diffuser type:	PMMA
Lamp type:	LED
Energy performance class:	F
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Power consumption (Watt):	8
Lumen:	960
Real Lumen:	180
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	31-52-50-85
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Power cable:	1 m H05RN-F
Type of protection:	IP 66
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK ENEC



All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically. Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.

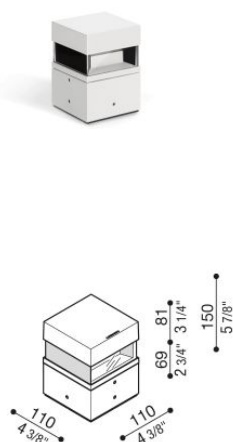

Tok Q2L H150

LL12812WN

Lombardo.



Installation images:



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Tok Q2L H150

LL12812WN


Lombardo.

Lighting simulation:

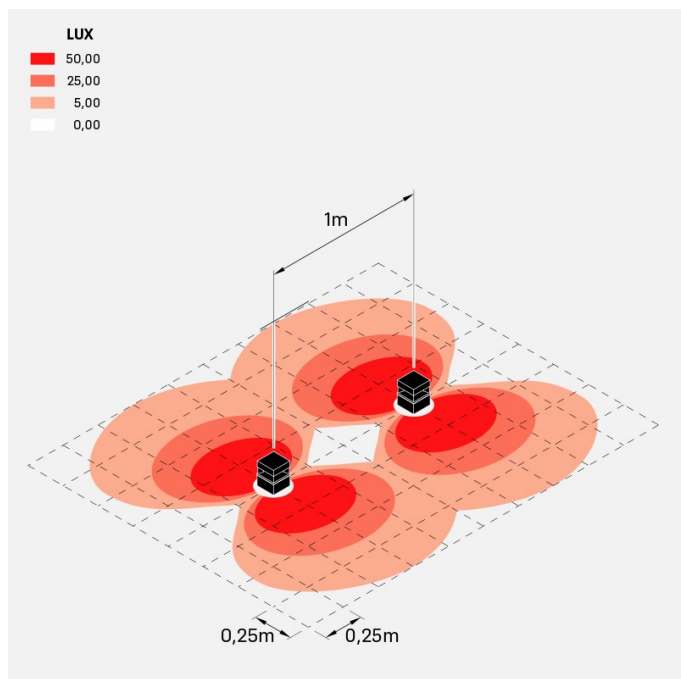

tok_Q2L_150

Photometric curves:

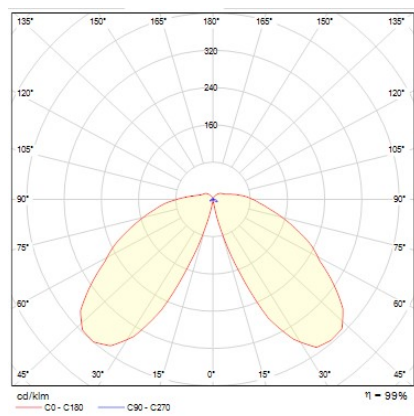

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it