


Technical information:

Installation:	Wall recess
Material:	Aluminium
Finish:	Black serigraphy
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	D
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	6
Lumen:	720
Real Lumen:	217
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	44-56-65-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA

Double cable entry at the back.



Stile Next 506L


LL661D2N

Lombardo.



LL661D2N

Lighting simulation:

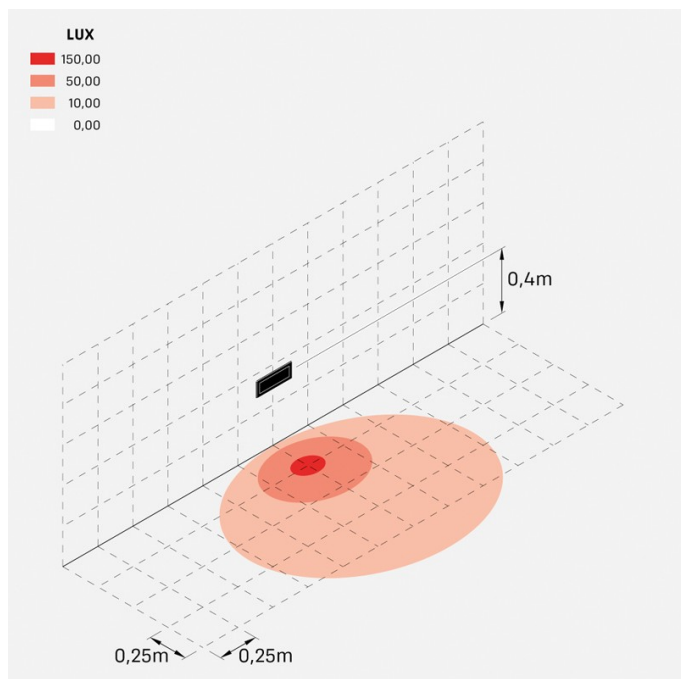

stile_next_506l

Photometric curves:

