


# CNC 25 2.0 Q

LT158010SN


**Lombardo.**



## Technical information:

|                                    |                                                    |
|------------------------------------|----------------------------------------------------|
| Installation:                      | Ground recess, Wall recess, Ceiling recess         |
| Material:                          | Aluminium                                          |
| Finish:                            | Sandblasted Grey                                   |
| Treatment:                         | Anodization                                        |
| Diffuser type:                     | Transparent glass                                  |
| Optics:                            | 30°                                                |
| Lamp type:                         | LED                                                |
| Energy performance class:          | G                                                  |
| Colour temperature:                | 4000K                                              |
| CRI:                               | >90                                                |
| LB Factor:                         | L80B20 - 100.000h                                  |
| Step MacAdam:                      | 3                                                  |
| Photobiological risk:              | RG1                                                |
| Power consumption (Watt):          | 2                                                  |
| Lumen:                             | 150                                                |
| Real Lumen:                        | 137                                                |
| Power supply:                      | ⊗ not included                                     |
| LED:                               | 24V                                                |
| Insulation class:                  | ⬡ CL.III                                           |
| Power cable:                       | 0.50 m H05RN-F 2x0.75                              |
| Type of protection:                | <b>IP 67</b>                                       |
| Resistance to breakage:            | <b>IK 10 20J xx9</b>                               |
| Standards and Marks of Conformity: | CE UK CA                                           |
| Additional features:               | ↓ 500 <sup>KG</sup> MAX Temp. max on diffuser 65°C |


Optic D not available for Honeycomb version.




# CNC 25 2.0 Q

LT158010SN

**Lombardo.**

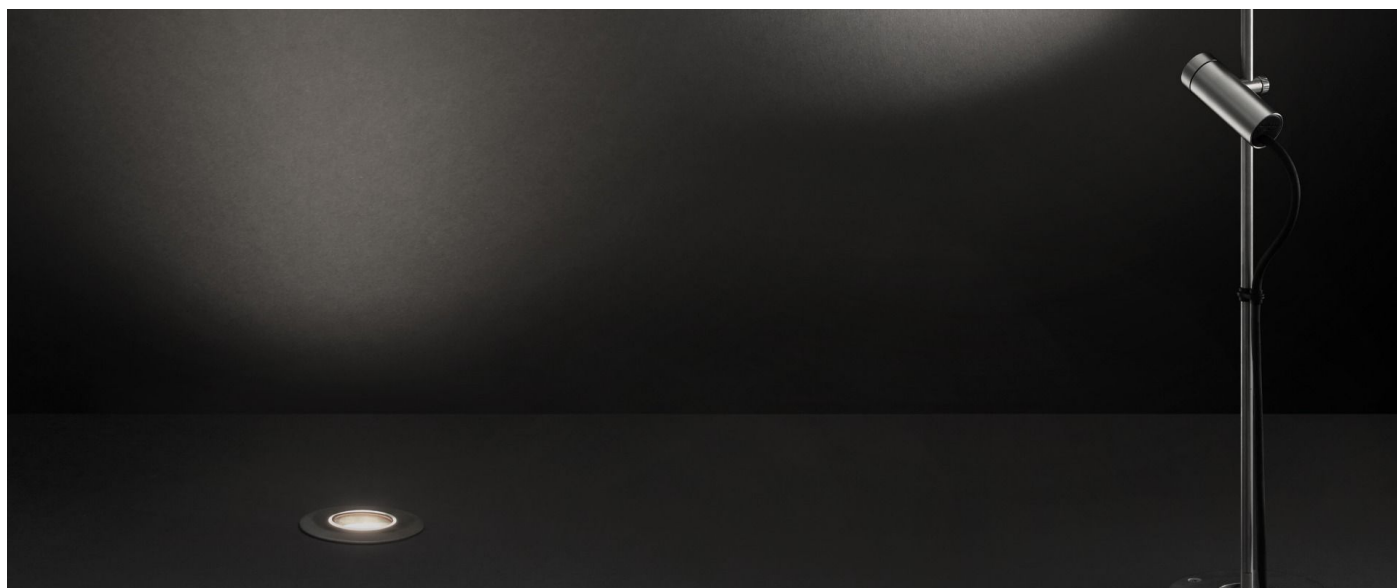


## Installation images:

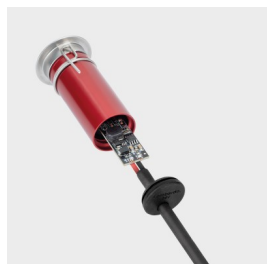


LT158010SN


## Lighting simulation:

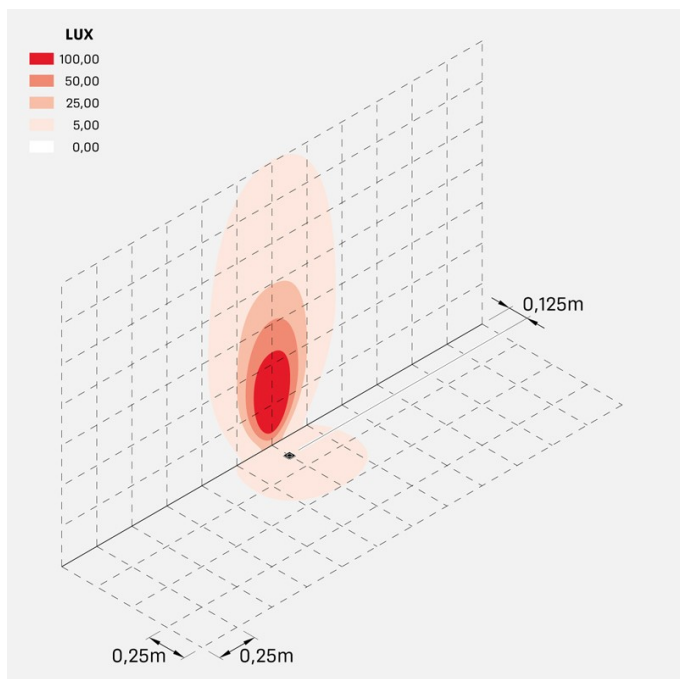

cnc\_25q\_20\_optic\_S

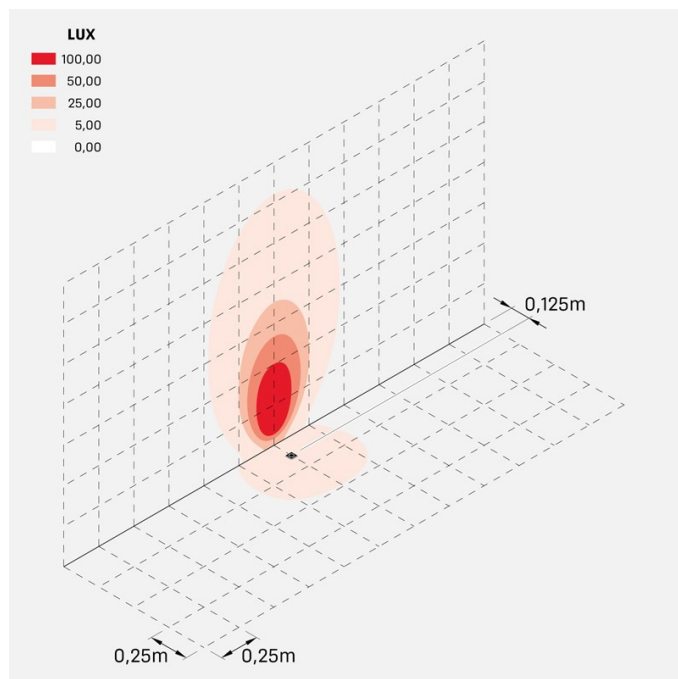

cnc\_25q\_20\_optic\_M

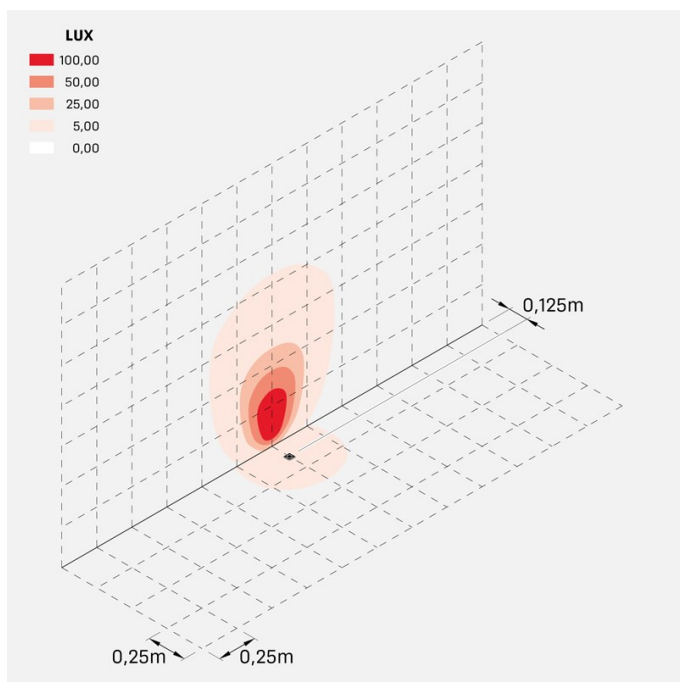

cnc\_25q\_20\_optic\_D

# CNC 25 2.0 Q

## LT158010SN

**Lombardo.**

### Photometric curves:

