


CNC 35 2.0 Q

LT158110S3


Lombardo.



Technical information:

Installation:	Ground recess, Wall recess, Ceiling recess
Material:	Aluminium
Finish:	Sandblasted Grey
Treatment:	Anodization
Diffuser type:	Transparent glass
Optics:	20°
Lamp type:	LED
Energy performance class:	G
Colour temperature:	3000K
CRI:	>90
LB Factor:	L80B20 - 100.000h
Step MacAdam:	3
Photobiological risk:	RG1
Power consumption (Watt):	2
Lumen:	150
Real Lumen:	147
Power supply:	⊗ not included
LED:	24V
Insulation class:	⬡ CL.III
Power cable:	0.50 m H05RN-F 2x0.75
Type of protection:	IP 67
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA
Additional features:	↓ 500 ^{KG} MAX Temp. max on diffuser 65°C

Optic D not available for Honeycomb version.




CNC 35 2.0 Q

LT158110S3


Lombardo.

Installation images:




LT158110S3


Lighting simulation:

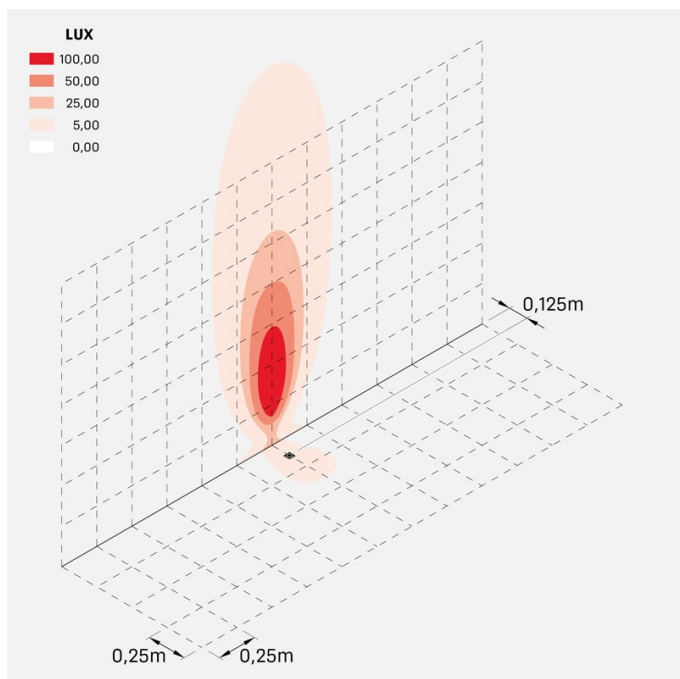


cnc_35q_20_optic_S

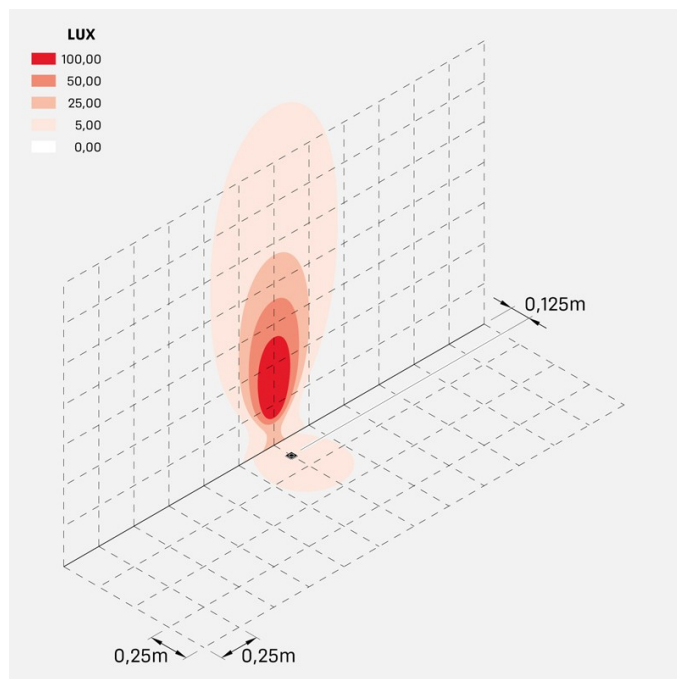

cnc_35q_20_optic_M

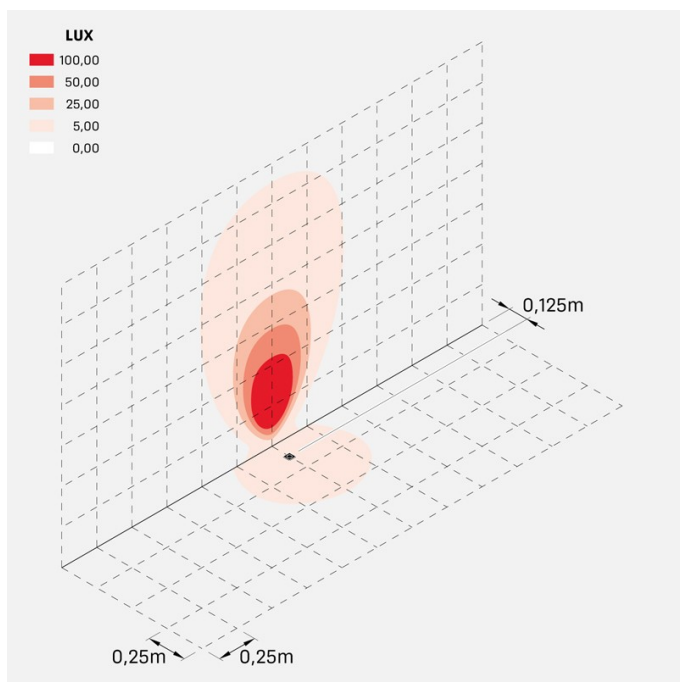

cnc_35q_20_optic_L

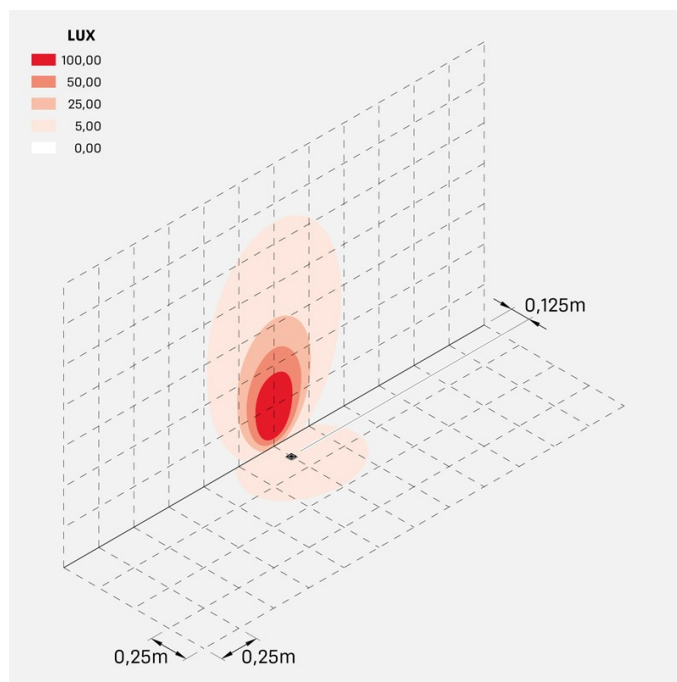

cnc_35q_20_optic_D

CNC 35 2.0 Q

LT158110S3

Lombardo.

Photometric curves:

