

Kit-01 Line Post H500

LOMBARDO



Generality



Type of product	Post 1 luminaire
Diffuser	Polycarbonate poliGLASS / poliGLASS
Model	Line
Producer	Lombardo S.r.l.
Design	design by Cristian Tengattini - Mirko Salvoni
Code	LL113002  - Black
E.A.N. code	
Pieces per package	1 piece

 N = (4000K)
3 = (3000K, lm -5%)
2 = (2700K, lm -5%)

Characteristic

Insulation class	CL.I
Type of protection	IP 66 
IK	IK 08 5J xx7
Lamp type	1 LED 700 lm 6,5W real output lm 500 Led versions with integral ballast

Energy performance class

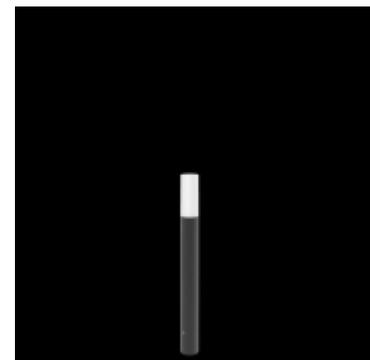

Standards and Marks of Conformity



Product description

Line suitable for indoor and outdoor use. Integrated driver 220 - 240V and the latest generation of Led with ratings of up to 11W. Body and cover made of die-cast aluminium primary alloy; highly resistant to oxidization thanks to the zirconium-based passivation treatment and UV stabilized polyester resin coating.

Diffuser made of very thick optical polycarbonate, poliGLASS finish, injection moulded and subsequent manual finishing.

Silicone gaskets IP66.

A4 stainless steel nuts and bolts.

Suitable for quick installation in standard posts Ø60 by means of stainless steel springs. Polycarbonate decorative cover, injection moulded, available in various colours and designs. Corten painted finish. Application of the cover without tools, by means of a special adhesive strip.

Post made of Bayblend without base, h: 1200 mm - 500 mm.

Alternative solution to the usual burial or to the post base using a retractable fixing bracket.

The post is inserted in the 3mm pre-drilled bracket made of hot-dip zinc-coated metal.

Accessory not suitable for posts higher than 1200mm.

LED 4000K (N), 3000K (3) or 2700K (2). LED. Integral ballast 220-240V. No risk of photobiological damage, RG0 group (EN62471).

Direct light version.

Kit consisting of the current codes LL113000N/3/2 + LB1130001/2/3/4 + LB11112/G/E/K + LB1130006.