

10813094

Product Sheet

ares

THE OUTDOOR BY FLOS


ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - web@aresill.net

Vincenza


- Outdoor LED bollard light (no light pollution).
- Configuration: die cast aluminium structure. EN AB-47100 alloy (low copper content). Extruded aluminium stem.
- Double layer coating for high resistance to corrosion: The low copper Aluminium alloy is painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Plastic sandblasted diffuser, neoprene gaskets.
- Protection Rating: IP65 ("base" version) and IP67 ("in-ground" version).
- In compliance with EN 60598-1 standards.
- Class of insulation: mains ("base" version): I, low voltage ("in-ground" version): III
- Installation: wiring through a M16x1,5mm cable gland for "with base version" and through two M16x1,5mm for "in-ground" version (4,5 • Pole with base: direct fixation with bolts to a concrete surface or through a fixing plate in a concrete basement.
- Pole in-ground: we recommend to concrete the root of the pole for better stability.

IP65   

Available Colors for this Version

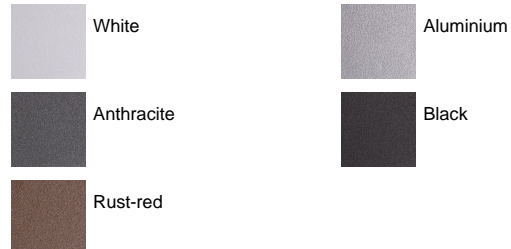

Vincenza Power LED / H. 800 mm - With Base - 360° Symmetric Emission



Warnings

Bollard



Bollard light.

Full cut-off luminaire (no light pollution).



The fitting is equipped with 1 cable input for base version.

Protection against impact. IK 10 - 20,00 joule

Light Flux, Placement



Product Code Details

10813094

Light Source



WARM WHITE 3000K POWER LEDs 4x2W/220-240V

Total power 8,5W


LED lm 570 ? FIXT lm 181

CRI >80

Electronic power supply included



Accessories



SPD: (Surge Protection Device) 275Vac
Maximum discharge current 10KA (8/20 μ s)
Maximum operating current 5A
Suitable for series connection - IP66
Code: 237