


AD-CLASSIC DIF PRISMA FDH G5 1X49W, ECG, RAL 9003

PRODUCT DESCRIPTION

MOUNTING	Ceiling surfaced (SFD) Suspended (SSD)
LIGHT SOURCE	Linear fluorescent lamp FDH (T5)
OPTICAL SYSTEM	Prismatic diffuser (PRD)
LIGHT DISTRIBUTION	Direct
WIRING	Electronic control gear FIX / 1-10 V / DSI / DALI (ECG / E10 / EDS / EDA)
MATERIALS	Housing: sheet steel Diffuser: prismatic PS (PMMA, PC on request)
SURFACE FINISH	Housing: white RAL 9003 (W03)
ACCESSORIES	Rope suspension Emergency unit variant (1H / 3H)

FEATURES


VOLTAGE	220-240 V, 50-60 Hz
NUMBER OF LAMPS	1
POWER	1 x 49 W
LAMPHOLDER	G5
EEC	A+ / A / B
PROTECTION CLASS	I
IP PROTECTION DEGREE	IP20
DIMENSIONS (L x W x H)	1550 x 173 x 84 mm
WEIGHT	5,7 kg
SAP NAME / SAP CODE	aCLC ASN PRD FDH 149 ECG W03 / H013AB0366



MAIN IMAGE




ACCESSORIES

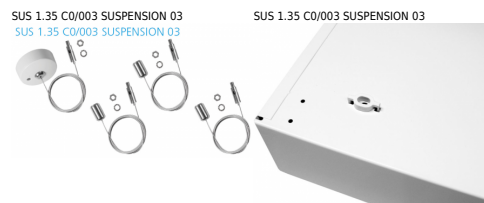


STANDARD



DIMENSIONS

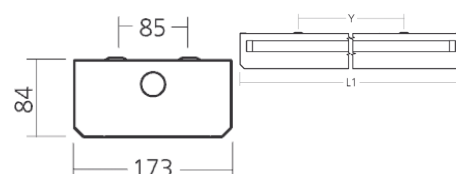

MOUNTING

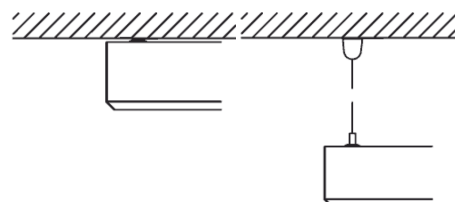

The Company reserves the right to change any product specifications without prior notification.