


## DROP 25

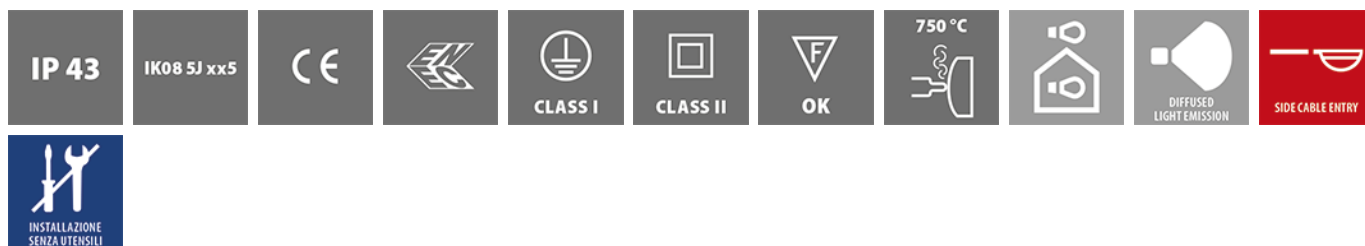

Series of wall and ceiling mounted luminaire for indoor and outdoor lighting, in two sizes, comprising:

Housing manufactured from technopolymer, white or painted finish 750 °C (EN 60695-2-11)

Pressed glass diffuser with internal pattern, inner white painted

Class II - double insulation for incandescent lamp versions

Aluminium reflector (incandescent version only)

Side cable entry


The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard

Phase change thermal interface

4000 K and 3000 K LED Array

Easy opening diffuser system



Lampholder	Watt	ILCOS	LBS	Colour	Insulation class		KELVIN	Optical type	Optic beam	Code
E27	1X100	IAA	A60	WHITE	II	✓	-	S/E/W	-	005010
G23	2X9	FSD	TC-S	WHITE	I	✓	-	S/E/W	-	005013