


DROP 28 750°

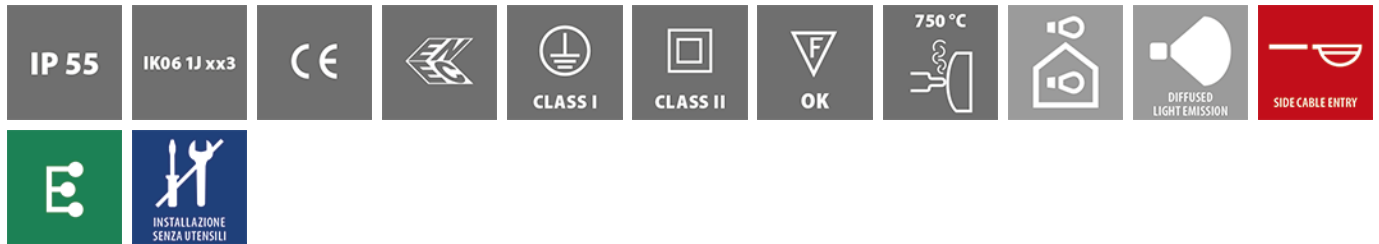

Series of wall and ceiling mounted luminaire for indoor and outdoor lighting, in two sizes, comprising:

Housing manufactured from technopolymer, white or painted finish 750 °C (EN 60695-2-11)

Pressed glass diffuser, total matt finish

Class II - double insulation for incandescent lamp versions

Aluminium reflector

Foam silicone gasket

Side entry for 20 mm conduits (drill out holes in housing)

The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard

Phase change thermal interface

4000 K and 3000 K LED Array

Chromed steel spring lock system to secure diffuser to the housing

Self adhesive signs available for 22 and 28 models

The EM/3P model is designed for multipurpose and emergency lighting

Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time



Lampholder	Watt	ILCOS	LBS	Colour	Insulation class		KELVIN	Optical type	Optic beam	Code
E27	1X100	IAA	A60	WHITE	II	✓	-	S/EW	-	004951
E27	1X100	IAA	A60	MATT METALLIC ANTHRACITE	II	✓	-	S/EW	-	004970
E27	1X100	IAA	A60	MATT METALLIC GREY	II	✓	-	S/EW	-	004972
G24d-3	1X26	FSQ	TC-D	MATT METALLIC ANTHRACITE	I	✓	2700	S/EW	-	004973
G24d-3	1X26	FSQ	TC-D	WHITE	I	✓	2700	S/EW	-	004974
G24d-3	1X26	FSQ	TC-D	MATT METALLIC GREY	I	✓	2700	S/EW	-	004975
G24q-1	1X13	FSQ	TC-DEL	WHITE	I	-	2700	S/EW	-	054967
G24q-1	1X13	FSQ	TC-DEL	MATT METALLIC GREY	I	-	2700	S/EW	-	054968
G24q-1	1X13	FSQ	TC-DEL	MATT METALLIC ANTHRACITE	I	-	2700	S/EW	-	054969
G24q-3	1X26	FSQ	TC-DEL	MATT METALLIC ANTHRACITE	I	✓	2700	S/EW	-	054973
G24q-3	1X26	FSQ	TC-DEL	WHITE	I	✓	2700	S/EW	-	054974
G24q-3	1X26	FSQ	TC-DEL	MATT METALLIC GREY	I	✓	2700	S/EW	-	054975