


### Technical information:

Installation:	Wall recess
Material:	Aluminium
Finish:	White RAL 9010
Diffuser type:	Frosted glass
Lamp type:	LED
Energy performance class:	E
Colour temperature:	4000K
CRI:	>80
LB Factor 50.000 h:	L80B50
Photobiological risk:	RG0
Power consumption (Watt):	7,2
Lumen:	750
Real Lumen:	375
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	44-56-65-82
B10 - C10 - B16 - C16	
Insulation class:	⊖ CL.I
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 10 20J xx9</b>
Standards and Marks of Conformity:	CE UK CA

Double cable entry at the back. **BORDO MARE:** add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.

*All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically. Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.*




**Fix 506**

LL120008N

**Lombardo.**



### Lighting simulation:

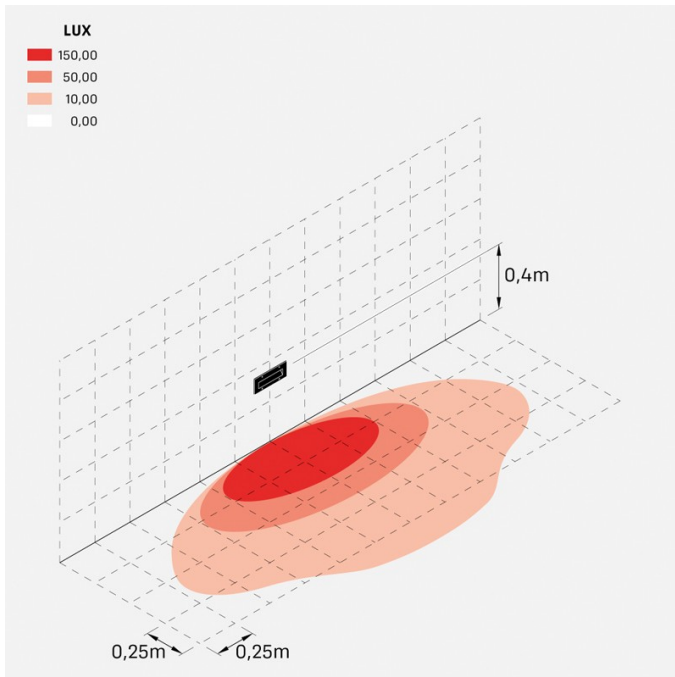

fix\_506

### Photometric curves:

